

# R-KER II Hybrid with Sockets

High performance vinylester resin approved for use with internally threaded sockets



## Approvals and Reports

- ETA-17/0594



## Product information

### Features and benefits

- Approved for use in non-cracked concrete (ETAG001 Option 7)
- Allows removal of bolt to leave a re-usable socket in place
- Winter version can be used in warmer temperatures for faster curing
- Suitable for use in dry and wet substrates as well as holes and substrates covered with water
- Rapid bonding time enables quick execution of works
- Very high load capacity
- Anchor does not generate tensions in the substrate which enables R-KER to be specified where closer edge and spacing distances are required
- Suitable for multiple use. Partly used product can be reused after fitting new nozzle


### Applications

- Curtain walling
- Balustrading
- Handrails
- Canopies

### Base materials

- Approved for use in:
- Non-cracked concrete C20/25-C50/60

## Installation guide

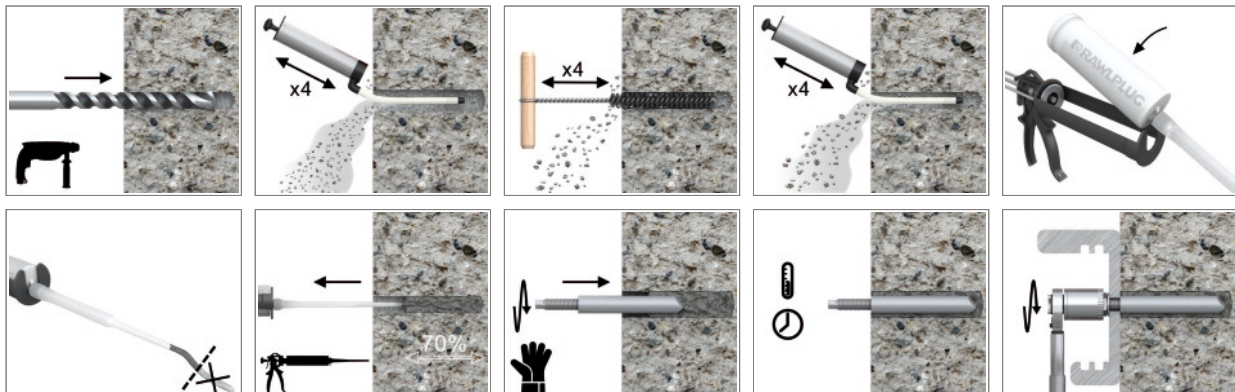

## Product information

1. Drill hole to the required diameter and depth for socket size being used.
2. Clean the hole with brush and hand pump at least four times each. It is very important and necessary before installation.
3. Insert cartridge into gun and attach nozzle.
4. Dispense to waste until even colour is obtained (min. 10cm)
5. Insert the mixing nozzle to the far end of the hole and inject resin, slowly withdrawing the nozzle as the hole is filled to 2/3 of its depth.
6. Immediately insert the socket, slowly and with slight twisting motion. Remove any excess resin around the hole before it sets and leave it undisturbed until the curing time elapses.
7. Attach fixture and tighten the bolt to the required torque.


Product Code	Resin	Description / Resin Type	Volume
			[ml]
R-KER-II-300	R-KER-II	R-KER II Hybrid Resin	300
R-KER-II-345			345
R-KER-II-400			400
R-KER-II-300-S	R-KER-II-S	R-KER II Hybrid Resin for High Temperature (Summer) / Slow Cure Styrene Free Hybrid Resin	300
R-KER-II-400-S			400
R-KER-II-300-W	R-KER-II-W	R-KER II Hybrid Resin for Low Temperature (Winter) / Rapid Cure Styrene Free Hybrid Resin	300
R-KER-II-345-W			345
R-KER-II-400-W			400

Size	Product Code	Resin	Description / Resin Type	Volume
				[ml]
Ø32	R-KER-II-300	R-KER-II	R-KER II Hybrid Resin	300
	R-KER-II-345			345
	R-KER-II-400			400
Ø40	R-KER-II-300-S	R-KER-II-S	R-KER II Hybrid Resin for High Temperature (Summer) / Slow Cure Styrene Free Hybrid Resin	300
	R-KER-II-400-S			400
Ø32	R-KER-II-300-W	R-KER-II-W	R-KER II Hybrid Resin for Low Temperature (Winter) / Rapid Cure Styrene Free Hybrid Resin	300
	R-KER-II-345-W			345
	R-KER-II-400-W			400

### SOCKETS

Size	Product Code		Anchor			Fixture	
	Steel class 5.8	Steel grade A4	Socket diameter	Length	Internal thread length	Hole diameter	Max. thickness $t_{fix}$ for:
			d	L	$l_g$	$d_f$	$h_{nom, std}$
			[mm]	[mm]	[mm]	[mm]	[mm]
M6	R-ITS-Z-06075	R-ITS-A4-06075	10	75	24	7	-
M8	R-ITS-Z-08075	R-ITS-A4-08075	12	75	25	9	-
	R-ITS-Z-08090	R-ITS-A4-08090	12	90	25	9	-
M10	R-ITS-Z-10075	R-ITS-A4-10075	16	75	30	12	-
	R-ITS-Z-10100	R-ITS-A4-10100	16	100	30	12	-
M12	R-ITS-Z-12100	R-ITS-A4-12100	16	100	35	14	-
M16	R-ITS-Z-16125	R-ITS-A4-16125	24	125	50	18	-

### Installation data

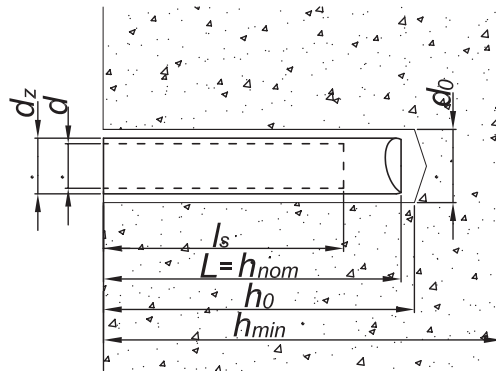

#### SOCKETS

Size		M6	M8	M10	M12	M16		
Installation depth	$h_{nom}$ [mm]	75	75	90	75	100	100	125
Thread diameter	$d$ [mm]	6	8	8	10	10	12	16
Hole diameter in substrate	$d_o$ [mm]	12	14	14	20	20	20	28
Hole diameter in fixture	$d_f$ [mm]	7	9	9	12	12	14	18
Thread engagement length	$h_s$ [mm]	24	25	25	30	30	35	50
Min. hole depth in substrate	$h_o$ [mm]	$h_{nom} + 5$	$h_{nom} + 5$	$h_{nom} + 5$	$h_{nom} + 5$	$h_{nom} + 5$	$h_{nom} + 5$	$h_{nom} + 5$
Min. substrate thickness	$h_{min}$ [mm]	$h_{nom} + 30$ $\geq 100$	$h_{nom} + 30$ $\geq 100$	$h_{nom} + 30$ $\geq 100$	$h_{nom} + 2d_o$	$h_{nom} + 2d_o$	$h_{nom} + 2d_o$	$h_{nom} + 2d_o$
Installation torque	$T_{inst}$ [Nm]	3	5	5	10	10	20	40
Min. spacing	$s_{min}$ [mm]	40	40	50	40	50	50	70
Min. edge distance	$c_{min}$ [mm]	40	40	50	40	50	50	70

### Minimum working and curing time

#### R-KER-II

Resin temperature	Concrete temperature	Curing time*	Working time
[°C]	[°C]	[min]	[min]
5	0	3 h	30
5	5	90	15
10	10	60	8
15	15	60	5
20	20	45	2.5
25	25	45	2
25	30	45	2
25	35	30	1.5
25	40	30	1.5

#### R-KER-II S

Resin temperature	Concrete temperature	Curing time*	Working time
[°C]	[°C]	[min]	[min]
5	5	12 h	40
10	10	8 h	20
15	15	6 h	15
20	20	4 h	13
25	25	3 h	9.5
25	30	2 h	7
25	35	2 h	6.5
25	40	1.5 h	6.5

## Installation data

R-KER-II W

Resin temperature	Concrete temperature	Curing time*	Working time
[°C]	[°C]	[min]	[min]
5	0	2 h	14
5	5	60	9
10	10	45	5.5
15	15	30	3
20	20	15	2
25	25	10	1.5
25	30	10	1.5
25	35	5	1
25	40	5	1

## Mechanical properties

Size			M6	M8	M10	M12	M16
<b>R-ITS-Z Internally Threaded Sockets</b>							
Nominal ultimate tensile strength - tension	$f_{uk}$	[N/mm <sup>2</sup> ]	520	500	500	500	500
Nominal yield strength - tension	$f_{yk}$	[N/mm <sup>2</sup> ]	420	400	400	400	400
Cross sectional area - tension	$A_s$	[mm <sup>2</sup> ]	20.1	36.6	58	84.3	157
Elastic section modulus	$W_{el}$	[mm <sup>3</sup> ]	21.21	50.3	98.2	169.7	402.1
<b>R-ITS-A4 Internally Threaded Sockets</b>							
Nominal ultimate tensile strength - tension	$f_{uk}$	[N/mm <sup>2</sup> ]	700	700	700	700	700
Nominal yield strength - tension	$f_{yk}$	[N/mm <sup>2</sup> ]	350	350	350	350	350
Cross sectional area - tension	$A_s$	[mm <sup>2</sup> ]	20.1	36.6	58	84.3	157
Elastic section modulus	$W_{el}$	[mm <sup>3</sup> ]	21.21	50.3	98.2	169.7	402.1
<b>Metric Threaded Rods - Steel Class 5.8</b>							
Characteristic bending resistance	$M_{Rk,s}^0$	[Nm]	8	19	37	65	166
Design bending resistance	M	[Nm]	6	15	30	52	133
Allowable bending resistance	$M_{rec}$	[Nm]	5	11	21	37	95
<b>Metric Threaded Rods - Steel Class 8.8</b>							
Characteristic bending resistance	$M_{Rk,s}^0$	[Nm]	12	30	60	105	266
Design bending resistance	M	[Nm]	10	24	48	84	213
Allowable bending resistance	$M_{rec}$	[Nm]	7	17	34	60	152
<b>Metric Threaded Rods - A4</b>							
Characteristic bending resistance	$M_{Rk,s}^0$	[Nm]	11	26	52	92	233
Design bending resistance	M	[Nm]	7	17	34	59	149
Allowable bending resistance	$M_{rec}$	[Nm]	5	12	24	42	107

## Basic performance data

### SOCKETS

Performance data for single anchor without influence of edge distance and spacing

Size	M6	M8	M10	M12	M16	M6	M8	M10	M12	M16					
Substrate	Non-cracked concrete					Cracked concrete									
Effective embedment depth $h_{ef}$ [mm]	75.0	90.0	75.0	100.0	125.0	75.0	90.0	75.0	100.0	125.0					
<b>MEAN ULTIMATE LOAD</b>															
TENSION LOAD $N_{Ru,m}$															
METRIC THREADED RODS - STEEL CLASS 5.8	[kN]	12.5	21.6	21.6	34.8	34.8	50.4	100.1	12.5	21.6	21.6	28.1	34.8	43.2	45.2
METRIC THREADED RODS - STEEL CLASS 8.8	[kN]	19.2	34.8	34.8	39.4	55.2	60.6	100.1	19.2	28.1	34.8	28.1	43.2	43.2	45.2
METRIC THREADED RODS - A4	[kN]	16.8	31.2	31.2	39.4	49.2	60.6	100.1	16.8	28.1	31.2	28.1	43.2	43.2	45.2
SHEAR LOAD $V_{Ru,m}$															
METRIC THREADED RODS - STEEL CLASS 5.8	[kN]	6.00	10.8	10.8	16.8	16.8	25.2	46.8	6.00	10.8	10.8	16.8	16.8	25.2	46.8
METRIC THREADED RODS - STEEL CLASS 8.8	[kN]	9.60	18.0	18.0	27.6	27.6	40.8	75.6	9.60	18.0	18.0	27.6	27.6	40.8	75.6
METRIC THREADED RODS - A4	[kN]	8.40	15.6	15.6	24.0	24.0	34.8	66.0	8.40	15.6	15.6	24.0	24.0	34.8	66.0
<b>CHARACTERISTIC LOAD</b>															
TENSION LOAD $N_{Rk}$															
METRIC THREADED RODS - STEEL CLASS 5.8	[kN]	10.00	18.0	18.0	29.0	29.0	42.0	70.6	10.00	18.0	18.0	23.4	29.0	36.0	37.7
METRIC THREADED RODS - STEEL CLASS 8.8	[kN]	16.0	29.0	29.0	32.8	46.0	50.5	70.6	16.0	23.4	29.0	23.4	36.0	36.0	37.7
METRIC THREADED RODS - A4	[kN]	14.0	25.0	25.0	32.8	40.0	50.5	70.6	14.0	23.4	25.0	23.4	36.0	36.0	37.7
SHEAR LOAD $V_{Rk}$															
METRIC THREADED RODS - STEEL CLASS 5.8	[kN]	5.00	9.00	9.00	14.5	14.5	21.0	39.0	5.00	9.00	9.00	14.5	14.5	21.0	39.0
METRIC THREADED RODS - STEEL CLASS 8.8	[kN]	8.00	14.5	14.5	23.0	23.0	33.5	62.5	8.00	14.5	14.5	23.0	23.0	33.5	62.5
METRIC THREADED RODS - A4	[kN]	7.00	12.5	12.5	20.0	20.0	29.5	54.5	7.00	12.5	12.5	20.0	20.0	29.5	54.5
<b>DESIGN LOAD</b>															
TENSION LOAD $N_{Rd}$															
METRIC THREADED RODS - STEEL CLASS 5.8	[kN]	6.67	12.0	12.0	19.3	19.3	28.0	47.1	6.67	12.0	12.0	15.6	19.3	24.0	25.1
METRIC THREADED RODS - STEEL CLASS 8.8	[kN]	10.7	19.3	19.3	21.9	30.7	33.7	47.1	10.7	15.6	19.3	15.6	24.0	24.0	25.1
METRIC THREADED RODS - A4	[kN]	7.49	13.4	13.4	21.4	21.4	32.6	47.1	7.49	13.4	13.4	15.6	21.4	24.0	25.1
SHEAR LOAD $V_{Rd}$															
METRIC THREADED RODS - STEEL CLASS 5.8	[kN]	4.00	7.20	7.20	11.6	11.6	16.8	31.2	4.00	7.20	7.20	11.6	11.6	16.8	31.2
METRIC THREADED RODS - STEEL CLASS 8.8	[kN]	6.40	11.6	11.6	18.4	18.4	26.8	50.0	6.40	11.6	11.6	18.4	18.4	26.8	50.0
METRIC THREADED RODS - A4	[kN]	4.49	8.01	8.01	12.8	12.8	18.9	34.9	4.49	8.01	8.01	12.8	12.8	18.9	34.9
<b>RECOMMENDED LOAD</b>															
TENSION LOAD $N_{rec}$															
METRIC THREADED RODS - STEEL CLASS 5.8	[kN]	4.76	8.57	8.57	13.8	13.8	20.0	33.6	4.76	8.57	8.57	11.1	13.8	17.1	18.0
METRIC THREADED RODS - STEEL CLASS 8.8	[kN]	7.62	13.8	13.8	15.6	21.9	24.1	33.6	7.62	11.1	13.8	11.1	17.1	17.1	20.0
METRIC THREADED RODS - A4	[kN]	5.35	9.55	9.55	15.3	15.3	22.5	33.6	5.35	9.55	9.55	11.1	15.3	17.1	18.0
SHEAR LOAD $V_{rec}$															
METRIC THREADED RODS - STEEL CLASS 5.8	[kN]	2.86	5.14	5.14	8.29	8.29	12.0	22.3	2.86	5.14	5.14	8.29	8.29	12.0	22.3
METRIC THREADED RODS - STEEL CLASS 8.8	[kN]	4.57	8.29	8.29	13.1	13.1	19.1	35.7	4.57	8.29	8.29	13.1	13.1	19.1	35.7
METRIC THREADED RODS - A4	[kN]	3.21	5.72	5.72	9.16	9.16	13.5	25.0	3.21	5.72	5.72	9.16	9.16	13.5	25.0

## Design performance data

### SOCKETS

Size			M6	M8		M10		M12	M16
Effective embedment depth	$h_{ef}$	[mm]	75.00	75.00	90.00	75.00	100.00	100.00	125.00
<b>TENSION LOAD</b>									
<b>STEEL FAILURE; STEEL CLASS 5.8</b>									
Characteristic resistance	$N_{Rk,s}$	[kN]	10.00	18.00	18.00	29.00	29.00	42.00	78.00
Partial safety factor	$\gamma_{Ms}$	-	1.50	1.50	1.50	1.50	1.50	1.50	1.50
<b>STEEL FAILURE; STEEL CLASS 8.8</b>									
Characteristic resistance	$N_{Rk,s}$	[kN]	16.00	29.00	29.00	16.00	46.00	67.00	125.00
Partial safety factor	$\gamma_{Ms}$	-	1.50	1.50	1.50	1.50	1.50	1.50	1.50
<b>STEEL FAILURE; STEEL GRADE A4-70</b>									
Characteristic resistance	$N_{Rk,s}$	[kN]	14.00	25.00	25.00	40.00	40.00	59.00	109.00
Partial safety factor	$\gamma_{Ms}$	-	1.87	1.87	1.87	1.87	1.87	1.87	1.87
<b>COMBINED PULL-OUT AND CONCRETE CONE FAILURE; NON-CRACKED CONCRETE, K1=10,1, C20/25 (40°C/24°C)</b>									
Characteristic bond resistance	$T_{Rk}$	[N/mm <sup>2</sup> ]	11.00	14.00	14.00	11.00	11.00	11.00	8.00
<b>COMBINED PULL-OUT AND CONCRETE CONE FAILURE; NON-CRACKED CONCRETE, K1=10,1, C20/25 (80°C/50°C)</b>									
Characteristic bond resistance	$T_{Rk}$	[N/mm <sup>2</sup> ]	11.00	14.00	14.00	11.00	11.00	11.00	8.00
<b>COMBINED PULL-OUT AND CONCRETE CONE FAILURE; NON-CRACKED CONCRETE, K1=10,1, C20/25 (120°C/80°C)</b>									
Characteristic bond resistance	$T_{Rk}$	[N/mm <sup>2</sup> ]	6.00	7.00	7.00	6.00	6.00	6.00	4.00
<b>COMBINED PULL-OUT AND CONCRETE CONE FAILURE; CRACKED CONCRETE, K1=7,2, C20/25 (40°C/24°C)</b>									
Characteristic bond resistance	$T_{Rk}$	[N/mm <sup>2</sup> ]	10.00	10.00	10.00	9.50	9.50	9.00	4.00
<b>COMBINED PULL-OUT AND CONCRETE CONE FAILURE; CRACKED CONCRETE, K1=7,2, C20/25 (80°C/50°C)</b>									
Characteristic bond resistance	$T_{Rk}$	[N/mm <sup>2</sup> ]	10.00	10.00	10.00	9.50	9.50	9.00	4.00
<b>COMBINED PULL-OUT AND CONCRETE CONE FAILURE; CRACKED CONCRETE, K1=7,2, C20/25 (120°C/80°C)</b>									
Characteristic bond resistance	$T_{Rk}$	[N/mm <sup>2</sup> ]	5.00	6.00	6.00	5.00	5.00	5.00	2.00
<b>COMBINED PULL-OUT AND CONCRETE CONE FAILURE</b>									
Installation safety factor	$\gamma_2$	-	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Increasing factors for $N_{Rd,p}$ - C30/37	$\psi_c$	-	1.04	1.04	1.04	1.04	1.04	1.04	1.00
Increasing factors for $N_{Rd,p}$ - C40/50	$\psi_c$	-	1.07	1.07	1.07	1.07	1.07	1.07	1.00
Increasing factors for $N_{Rd,p}$ - C50/60	$\psi_c$	-	1.09	1.09	1.09	1.09	1.09	1.09	1.00
<b>CONCRETE CONE FAILURE</b>									
Installation safety factor	$\gamma_2$	-	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Factor for cracked concrete	$k$	-	7.20	7.20	7.20	7.20	7.20	7.20	7.20
Factor for cracked concrete	$k_{cr,N}$	-	7.70	7.70	7.70	7.70	7.70	7.70	7.70
Factor for non-cracked concrete	$k$	-	10.10	10.10	10.10	10.10	10.10	10.10	10.10
Factor for non-cracked concrete	$k_{ucr,N}$	-	11.00	11.00	11.00	11.00	11.00	11.00	11.00
Edge distance	$c_{cr,N}$	[mm]	$1.5 \cdot h_{ef}$	$1.5 \cdot h_{ef}$	$1.5 \cdot h_{ef}$	$1.5 \cdot h_{ef}$	$1.5 \cdot h_{ef}$	$1.5 \cdot h_{ef}$	$1.5 \cdot h_{ef}$
Spacing	$s_{cr,N}$	[mm]	$3.0 \cdot h_{ef}$	$3.0 \cdot h_{ef}$	$3.0 \cdot h_{ef}$	$3.0 \cdot h_{ef}$	$3.0 \cdot h_{ef}$	$3.0 \cdot h_{ef}$	$3.0 \cdot h_{ef}$
<b>CONCRETE SPLITTING FAILURE</b>									
Installation safety factor	$\gamma_2$	-	1.00	1.00	1.00	1.00	1.00	1.00	1.00

## Design performance data

Size			M6	M8	M10	M12	M16		
<b>SHEAR LOAD</b>									
<b>STEEL FAILURE; STEEL CLASS 5.8</b>									
Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	5.00	9.20	9.20	14.50	14.50	21.10	39.30
Characteristic resistance with lever arm	$M_{Rk,s}$	[Nm]	7.60	18.70	18.70	37.40	37.40	65.50	166.50
Partial safety factor	$\gamma_{Ms}$	-	1.25	1.25	1.25	1.25	1.25	1.25	1.25
<b>STEEL FAILURE; STEEL CLASS 8.8</b>									
Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	8.00	14.60	14.60	23.20	23.20	33.70	62.80
Characteristic resistance with lever arm	$M_{Rk,s}$	[Nm]	12.20	30.00	30.00	59.80	59.80	104.80	266.40
Partial safety factor	$\gamma_{Ms}$	-	1.25	1.25	1.25	1.25	1.25	1.25	1.25
<b>STEEL FAILURE; STEEL GRADE A4-70</b>									
Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	7.00	12.80	12.80	20.30	20.30	29.50	55.00
Characteristic resistance with lever arm	$M_{Rk,s}$	[Nm]	10.70	26.20	26.20	52.30	52.30	91.70	233.10
Partial safety factor	$\gamma_{Ms}$	-	1.56	1.56	1.56	1.56	1.56	1.56	1.56
<b>CONCRETE PRY-OUT FAILURE</b>									
Factor	k	-	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Installation safety factor	$\gamma_2$	-	1.00	1.00	1.00	1.00	1.00	1.00	1.00
<b>CONCRETE EDGE FAILURE</b>									
Anchor diameter	$d_{nom}$	[mm]	10.00	12.00	12.00	16.00	16.00	16.00	24.00
Effective length of anchor	$l_f$	[mm]	min ( $h_{ef}; 8d_{nom}$ )	min ( $h_{ef}; 8d_{nom}$ )	min ( $h_{ef}; 8d_{nom}$ )	min ( $h_{ef}; 8d_{nom}$ )	min ( $h_{ef}; 8d_{nom}$ )	min ( $h_{ef}; 8d_{nom}$ )	min ( $h_{ef}; 8d_{nom}$ )
Installation safety factor	$\gamma_2$	-	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Combined pull-out and concrete cone failure (TR 029, p.5.2.2.3. acc. to formula 5.2a -  $N_{Rk,p}^0 = n \cdot d \cdot h_{ef} \cdot \tau_{Rk}$ ).

Concrete cone failure (TR 029, p.5.2.2.4. acc. to formula 5.3a -  $N_{Rk,c}^0 = k_1 \cdot f_{ck,cube}^{0.5} \cdot h_{ef}^{1.5}$ ).

$h_{ef} = h_{nom}$

## Product commercial data

Size	Product Code	Volume [ml]	Quantity [pcs]			Weight [kg]			Bar Codes
			Box	Outer	Pallet	Box	Outer	Pallet	
Ø32	R-KER-II-300 <sup>1)</sup>	300	10	10	840	5.2	5.2	466.8	5906675293738
	R-KER-II-345 <sup>1)</sup>	345	10	10	840	7.6	7.6	668.4	5906675395203
	R-KER-II-400 <sup>1)</sup>	400	10	10	560	8.2	8.2	489.2	5906675392103
Ø40	R-KER-II-300-S <sup>1)</sup>	300	10	10	840	5.2	5.2	466.8	5906675432045
Ø32	R-KER-II-400-S <sup>1)</sup>	400	10	10	560	8.2	8.2	489.2	5906675432076
	R-KER-II-300-W <sup>1)</sup>	300	10	10	840	5.2	5.2	466.8	5906675432038
	R-KER-II-345-W <sup>1)</sup>	345	10	10	840	7.6	7.6	668.4	5906675432052
	R-KER-II-400-W <sup>1)</sup>	400	10	10	560	8.2	8.2	489.2	5906675432069

1) ETA-17/0594